

Sign Locations at Intersections

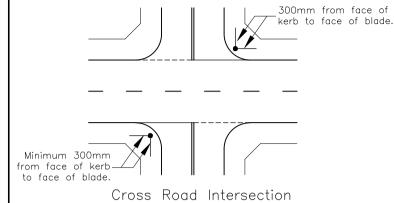



T Intersection

NOTES ON STANDARD STREET SIGN:-

THE STREET SIGNS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH:

AS1743-2001 ROAD SIGNS - SPECIFICATIONS, SIGN NUMBER G5-1.

AS1742.5 - 1997 MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES -PART 5: STREET NAME AND COMMUNITY FACILITY NAME SIGNS.

04	07/08/19	UPDATED PLAN	
03	19/06/19	UPDATED PLAN	
02	11/12/13	UPDATED PLAN	
01	11/12/13	ORIGINAL ISSUE	
VERSION	DATE	COMMENTS	

WORK TO FIGURED DIMENSIONS - DO NOT SCALE. DO NOT RELY ON THESE STANDARD DRAWINGS AS THE EQUIVALENT OF, OR SUBSTITUTE FOR, PROJECT-SPECIFIC DESIGN & ASSESSMENT BY A QUALIFIED PROFESSIONAL.



600mm minimum depth

Sign Post Installation

Approved. 200mm bracket with anti-theft fixings

> 50mm Galvanised post

BILLABONG ™

www.lakemac.com.au Lake Macquarie

City Council

300mm dia.

minimum width

> 126-138 MAIN ROAD SPEERS POINT PHONE (02)4921 0333

1 OF 2

DRAWING TITLE

Kerb

edge

XXXXXXXXX

275mm

galvanised Ŭ−Lock

300mm

STANDARD STREET SIGNS

DRAWING No: EGSD - 901 VERSION:

04